


Machine Screws, Pan Head, Cross Recessed, Metric, Zinc Plated

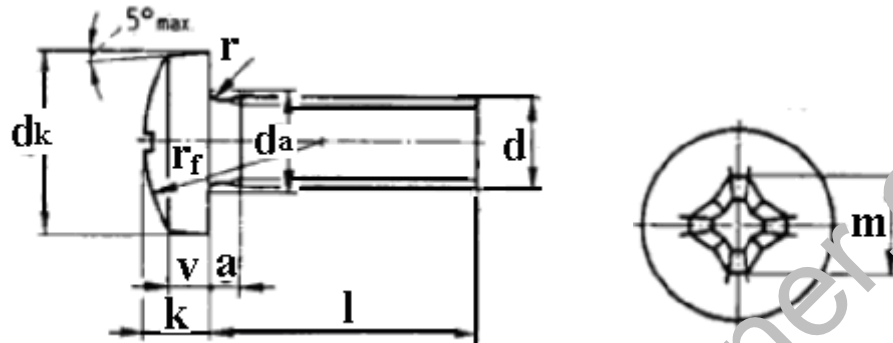

d	a (max)	da (max)	dk		k		r (min)	rf	Recess Penetration		m Ref.	No.	
			min	max	min	max			min	max			
M2-0.4	0.8	2.6	3.7	4.0	1.48	1.72	0.10	4.0	1.10	1.10	1.40	2.5	1
M2.5-0.45	0.9	3.1	4.7	5.0	1.88	2.12	0.10	5.0	1.30	1.30	1.60	2.7	
M3-0.5	1.0	3.6	5.7	6.0	2.28	2.52	0.10	6.0	1.60	1.70	2.0	3.1	
M3.5-0.6	1.2	4.1	6.64	7.0	2.58	2.82	0.20	7.0	1.90	1.74	2.24	4.2	2
M4-0.7	1.4	4.7	7.64	8.0	2.95	3.25	0.20	8.0	2.00	2.04	2.54	4.6	
M5-0.8	1.6	5.7	9.64	10.0	3.65	3.95	0.20	10.0	2.25	2.77	3.27	5.3	3
M6-1.0	2.0	6.8	11.57	12.0	4.45	4.75	0.25	12.0	3.00	3.03	3.53	6.8	
M8-1.25	2.5	9.2	15.57	16.0	5.85	6.15	0.40	16.0	3.70	4.18	4.68	9.0	4
M10-1.5	3.0	11.2	19.48	20.0	7.02	7.68	0.40	20.0	4.80	5.38	5.88	10.2	

Specification Requirements:

- Dimensions: DIN 7985
- Threads: 6g
- Drive Style: Cross Recessed, Type H
- Material & Mechanical Properties: ISO 898-1, Class 4.8