


Split Lock Washers

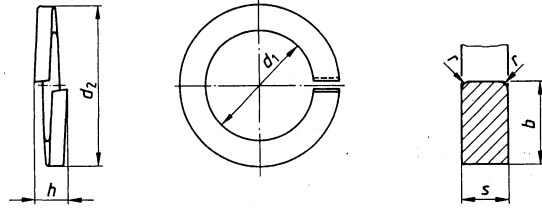

Nominal Size	D1		d2	b		S		r		
	Min.	Max.	Max.	Limit Dev.		Limit Dev.		Min.	Max.	
2	2.1	2.4	4.4	0.9	+/-0.1	0.5	+/-0.1	1	1.2	0.1
2.2	2.3	2.6	4.8	1		0.6		1.2	1.4	0.1
2.5	2.6	2.9	5.1	1		0.6		1.2	1.4	0.1
3	3.1	3.4	6.2	1.3		0.8		1.6	1.9	0.2
3.5	3.6	3.9	6.7	1.3		0.8		1.6	1.9	0.2
4	4.1	4.4	7.6	1.5		0.9		1.8	2.1	0.2
5	5.1	5.4	9.2	1.8	1.2	2.4	2.8	0.2		
6	6.1	6.5	11.8	2.5	+/-0.15	1.6	3.2	3.8	0.3	
7	7.1	7.5	12.8	2.5		1.6	3.2	3.8	0.3	
8	8.1	8.5	14.8	3	2	4	4.7	0.5		
10	10.2	10.7	18.1	3.5	2.2	+/-0.15	4.4	5.2	0.5	
12	12.2	12.7	21.1	4	2.5		5	5.9	1	
14	14.2	14.7	24.1	4.5	3	6	7.1	1		
16	16.2	17	27.4	5	+/-0.2	3.5	7	8.3	1	
18	18.2	19	29.4	5		3.5	7	8.3	1	
20	20.2	21.2	33.6	6	4	+/-0.2	8	9.4	1	
22	22.5	23.5	35.9	6	4		8	9.4	1	
24	24.5	25.5	40	7	5	+/-0.2	10	11.8	1.6	
27	27.5	28.5	43	8	5		10	11.8	1.6	
30	30.5	31.7	48.2	8	6	+/-0.25	12	14.2	1.6	
36	36.5	37.7	58.2	10	6		12	14.2	1.6	
39	39.5	40.7	61.2	10	6	+/-0.25	12	14.2	1.6	
42	42.5	43.7	68.2	12	7		14	16.5	2	
45	45.5	46.7	71.2	12	7	+/-0.25	14	16.5	2	
48	49	50.5	75	12	7		14	16.5	2	
52	53	54.5	83	14	8	+/-0.25	16	18.9	2	
56	57	58.5	87	14	8		16	18.9	2	
60	61	62.5	91	14	8	+/-0.25	16	18.9	2	
64	65	66.5	95	14	8		16	18.9	2	
68	69	70.5	99	14	8	+/-0.25	16	18.9	2	
72	73	74.5	103	14	8		16	18.9	2	
80	81	82.5	111	14	8	+/-0.25	16	18.9	2	
90	91	92.5	121	14	8		16	18.9	2	
100	101	102.5	131	14	8	16	18.9	2		

Specification Requirements:

- Dimensions: DIN 127B
- Material & Mechanical Properties: Spring Steel, Hardness HRC 44 to 51