


# Hanger Bolts

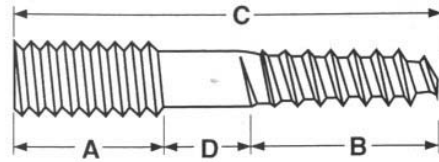

Diameter	C	A	B	D
	Standard Length	Machine Thread Length	Lag Thread Length	Center Space
6-32	5/8	1/4	3/8	-
	3/4	3/8	3/8	-
	7/8	1/4	5/8	-
	1	3/8	5/8	-
8-32	5/8	1/4	3/8	-
	3/4	3/8	3/8	-
	7/8	1/4	5/8	-
	1	3/8	5/8	-
	1-1/4	5/8	5/8	-
	1-1/2	3/8	7/8	-
	1-3/4	1/2	1	-
10-24	1	3/8	5/8	-
	1 1/4	5/8	5/8	-
	1 1/2	3/8	7/8	1/4
	1 3/4	1/2	1	1/4
	2	5/8	1	3/8
	2 1/2	5/8	1 1/2	3/8
	3	7/8	1 1/2	5/8
	3 1/2	7/8	2	5/8
1/4-20	1	3/8	5/8	-
	1 1/4	5/8	5/8	-
	1 1/2	3/8	7/8	1/4
	1 3/4	1/2	1	1/4
	2	5/8	1	3/8
	2 1/4	5/8	1 1/4	3/8
	2 1/2	5/8	1 1/2	3/8
	2 3/4	7/8	1 1/2	3/8
	3	7/8	1 1/2	5/8
	3 1/2	7/8	2	5/8
	4	1 1/8	2	7/8
	4 1/2	1 1/8	3	3/8
	5	1 3/8	3	5/8
	6	1 1/2	3	1 1/2

5/16-18	1 1/2	3/8	7/8	1/4
	1 3/4	1/2	1	1/4
	2	5/8	1	3/8
	2 1/4	5/8	1 1/4	3/8
	2 1/2	5/8	1 1/2	3/8
	2 3/4	7/8	1 1/2	3/8
	3	7/8	1 1/2	5/8
	3 1/2	7/8	2	5/8
	3 3/4	Not Available		
	4	1 1/8	2	7/8
	4 1/2	1 1/8	3	3/8
	5	1 3/8	3	5/8
3/4-16	5 1/2	1 1/2	3	1
	6	1 1/2	3	1 1/2
	1 1/2	3/8	7/8	1/4
	2	5/8	1	3/8
	2 1/2	5/8	1 1/2	3/8
	3	7/8	1 1/2	5/8
	3 1/2	7/8	2	5/8
	4	1 1/8	2	7/8
	4 1/2	1 1/8	3	3/8
	5	1 3/8	3	5/8
	5 1/2	1 1/2	3	1
	6	1 1/2	3	1 1/2
8	2 1/2	3	2 1/2	
10	2 1/2	3	4 1/2	
12	2 1/2	3	6 1/2	

\*\*\*Tolerance on length: Up to 6" +/- 1/16" Over 6": +/- 1/8"

## Specification Requirements:

- Dimensions: See dimensions above.
- Machine Screw  
Thread Requirements: ASME B1.1 UNC & UNF Class 1A
- Lag Screw  
Thread Requirements: Per ASME B18.2.1
- Material: Low Carbon Steel.